

GrandTwin SuperServer SYS-211GT-HNTR

2U 4-Node GrandTwin with up to 6 hot-swap 2.5" NVMe/SATA drives per node and rear I/O



More details here

Key Applications

HPC, Cloud Gaming, Telco Edge, MEC (Multi-Access Edge Computing), Multi-Purpose CDN, High-availability Cache Cluster, EDA (Electric Design Automation), Mission Critical Web Applications,


Key Features

- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;:
- Single-Socket, 5th/4th Gen Intel® Xeon® Scalable processors up to 300W TDP;
- Intel® C741;
- 16 DIMM Slots supporting up to 4TB of memory; ECC RDIMMs up to DDR5-5600;
- 2 AIOM;
- Up to 6 Hot-swap 2.5" NVMe/SATA drives;
- 2x cooling fans per 2U enclosure, 16K RPM Heavy Duty; Shared Cooling Design;
- 2200W Redundant Power Supplies Titanium Level (96%+); Shared Power Design;




Form Factor	2U Rackmount Enclosure: 449 x 88 x 711.2mm (17.67" x 3.46" x 28") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28")
Processor	Single Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 300MB Cache
System Memory	Slot Count: 16 DIMM slots/2 Channels Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 4TB 4400MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 6 bays <ul style="list-style-type: none"> • 6 front hot-swap 2.5" NVMe/SATA drive bays M.2: 2 M.2 NVMe/SATA slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)
On-Board Devices	Chipset: Intel® C741 Network Connectivity: Via IO Module
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports Video: 1 VGA port

(Front View – System)

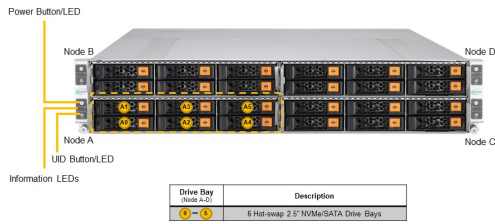

(Rear View – System)

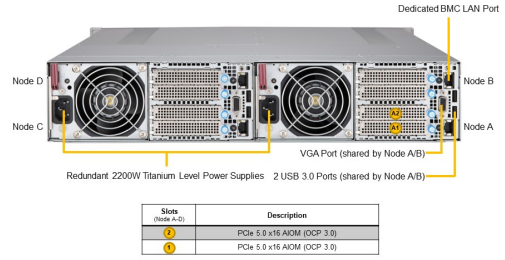

System Cooling	Fans: Up to 2x 16K RPM Heavy Duty 8cm Fan(s)
Power Supply	1x 2200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB Flash ROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 8+4 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory. FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment
Dimensions and Weight	Weight: Gross Weight: 88 lbs (39.9 kg) Net Weight: 68 lbs (30.8 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	Super X13SET-G
Chassis	CSE-GT214BC-R2K21BP