


# G294-A22-AAP2

HPC/AI Server - Intel® Xeon® 6900 - 2U UP 8 x PCIe Gen5 GPUs

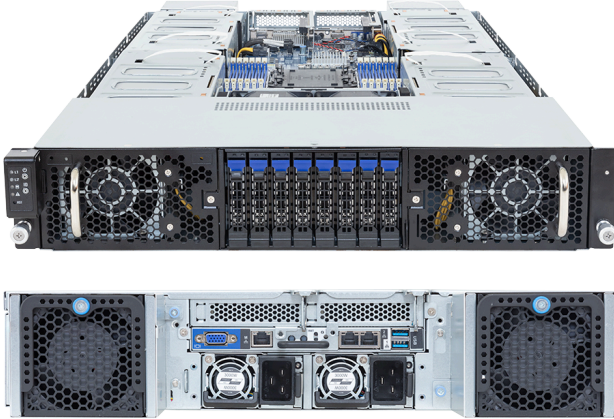

## Key Features

- Supports up to 8 x Dual slot Gen5 GPUs
  - 4 x NVIDIA H200 NVL PCIe GPUs with 2-way NVLink bridges or
  - 4 x NVIDIA RTX PRO™ 6000 Blackwell Server Edition GPUs
- Single Intel® Xeon® 6900-Series Processors
- 12-Channel DDR5 RDIMM / MRDIMM, 12 x DIMMs
- 2 x 10Gb/s LAN ports via Intel® X710-AT2
- 8 x 2.5" SATA/SAS-4 hot-swap bays
- 8 x FHFL PCIe Gen5 x16 slots for GPUs
- 2 x LP PCIe Gen5 x16 slots for add-in cards
- Dual 3000W 80 PLUS Titanium redundant power supply

## Applications

AI Platform, AI Training Server, AI Inference Server, Visual Computing, High-Performance Computing Server...

## Specification

<b>Dimensions</b>	2U (W448 x H87.5 x D962 mm, depth incl. 112 mm rear fans)	<b>PCIe Expansion Slots</b>	8 x FHFL PCIe Gen5 x16, for GPUs 2 x LP PCIe Gen5 x16, for add-in cards
<b>Motherboard</b>	MA24-G20		
<b>CPU</b>	Intel® Xeon® 6 Processors - Intel® Xeon® 6900-Series Processors Single processor, TDP up to 500W		*The system supports 4 x NVIDIA H200 NVL PCIe GPUs at 25°C ambient, arranged as two 2-GPU sets, each with a 2-way NVLink bridge. *The system supports 4 x RTX PRO™ 6000 Blackwell Server Edition GPUs at 25°C ambient.
<b>OS Compatibility</b>	<a href="#">OS Support List</a>	<b>I/O Ports</b>	<b>Rear:</b> 2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN
<b>Socket</b>	1 x LGA 7529 (Socket BR)	<b>Backplane Board</b>	PCIe Gen5 x4 or SATA 6Gb/s or SAS-4 24Gb/s
<b>Chipset</b>	System on Chip	<b>TPM</b>	1 x TPM header (SPI), Optional TPM2.0 kit: CTM012 1 x ProT connector (only enabled on RoT SKU)
<b>Memory</b>	12-Channel DDR5 RDIMM/MRDIMM, 12 x DIMMs [RDIMM] Up to 6400 MT/s [MRDIMM] Up to 8800 MT/s [1]  [1] MRDIMMs are supported only on select Intel® Xeon® 6 processors with P-cores.	<b>Power Supply</b>	Dual 3000W 80 PLUS Titanium redundant power supply AC Input: 100-240V  *The system power supply requires C19 power cord.
<b>LAN</b>	2 x 10Gb/s LAN (1 x Intel® X710-AT2), Support NCSI 1 x 10/100/1000 Mbps Management LAN	<b>System Fans</b>	8 x 80x80x80mm
<b>Video</b>	Integrated in ASPEED® AST2600 - 1 x VGA port	<b>Operating Properties</b>	Operating: 10°C to 30°C, 8% to 80% (non-condensing) Non-operating: -40°C to 60°C, 20% to 95% (non-condensing)
<b>Storage</b>	<b>Front hot-swap:</b> 8 x 2.5" SATA/SAS-4 [1]  [1] SAS card is required to support SAS drives.	<b>Packaging Content</b>	1 x G294-A22-AAP2 1 x CPU heatsink 4 x GPU power cables (16-pin, 250mm) 4 x GPU power cables (16-pin, 280mm) 1 x Carrier 1 x L-shape Rail kit
<b>RAID</b>	Require RAID add-in cards Onboard VROC key header	<b>Ordering Part Numbers</b>	6NG294A22DR000AAP2*



Learn more at: <https://www.gigabyte.com/Enterprise>

\* All specifications are subject to change without notice. Please visit our website for the latest information.

\* All trademarks and logos are the properties of their respective holders.

© 2026 Giga Computing Technology Co., Ltd. All rights reserved.

Last updated: Mar 25, 2026

Designed by

