

# Storage SuperServer SSG-542B-E1CR36L

4U UP front/rear-loading storage server with 36 hot-swap 3.5" SAS/SATA bays (SAS HBA) and PCIe 5.0



More details here

## Key Applications


General Purpose Computing, Data Center Enterprise Applications, iSCSI SAN, Database Processing & Storage, Corporate Database, Appliance Optimized Storage Building Blocks,

## Key Features

- HBA via Broadcom® SAS3816 connected on all 2.5"/3.5" drive bays;
- Single Intel® Xeon® 6700/6500 series processor up to 350W TDP;
- Up to 2TB DDR5-6400MT/s registered ECC in 8 DIMM slots (1DPC);
- 2 onboard 10GbE ports via Intel® X550 and 1GbE port for BMC via Aspeed AST2600;
- Six total PCIe slots: 3 PCIe 5.0 x8 + 3 PCIe 5.0 x16 slots \*
  - \* Slot 1 & 2 are occupied by system's default controller and JBOD module;
- \* up to total 10 NVMe ports in the system
  - 4U hybrid hot-swap NVMe/SAS3/SATA3 main (3.5" x 36) and rear (2.5" x 2) drive bays \*;
- 1600W Redundant Titanium Level (96%) Hot-plug power supplies;



Form Factor	4U Rackmount Enclosure: (17.2" x 7" x 27.5") Package: (27" x 15" x 39")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 86C/172T; Up to 336MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
System Memory	Slot Count: 8 DIMM slots/8 Channels Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM
Drive Bays Configuration	<p>Default: Total 38 bays</p> <ul style="list-style-type: none"> <li>• 24 front hot-swap 3.5" SAS/SATA drive bays</li> <li>• 12 rear hot-swap 3.5" SAS/SATA drive bays</li> <li>• 2 rear hot-swap 2.5" SAS/SATA drive bays</li> </ul> <p>Option A: Total 10 bays</p> <ul style="list-style-type: none"> <li>• 8 front hot-swap 3.5" PCIe 5.0 x4 NVMe* drive bays</li> <li>• 2 rear hot-swap 2.5" PCIe 5.0 x4 NVMe* drive bays</li> </ul> <p>(*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details)</p> <p>M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 22110(default))</p>
Expansion Slots	<p>Default</p> <ul style="list-style-type: none"> <li>• 3 PCIe 5.0 x8 (in x8) LP slots</li> <li>• 3 PCIe 5.0 x16 (in x16) LP slots</li> </ul>
On-Board Devices	<p>SATA: 4 x SlimSAS</p> <p>SAS: SAS (12Gbps) via Broadcom® 3916; RAID 0/1/5/6/10/50/60 support</p> <p>NVMe: NVMe; RAID 0/1 support(Intel® VROC RAID key required)</p> <p>Chipset: System on Chip</p> <p>Network Connectivity: 2 RJ45 10GbE with Intel® X550</p>
Input / Output	<p>LAN: 2 RJ45 10 GbE LAN ports (Intel® X550) 1 RJ45 1 GbE Dedicated BMC LAN port (IPMI shared on LAN port 1)</p> <p>USB: 2 USB 3.2 Gen1 ports(Header) 2 USB 3.2 Gen1 ports(Rear)</p> <p>Video: 1 VGA port</p> <p>Serial: 1 COM port(header)</p> <p>TPM: 1 TPM header</p>

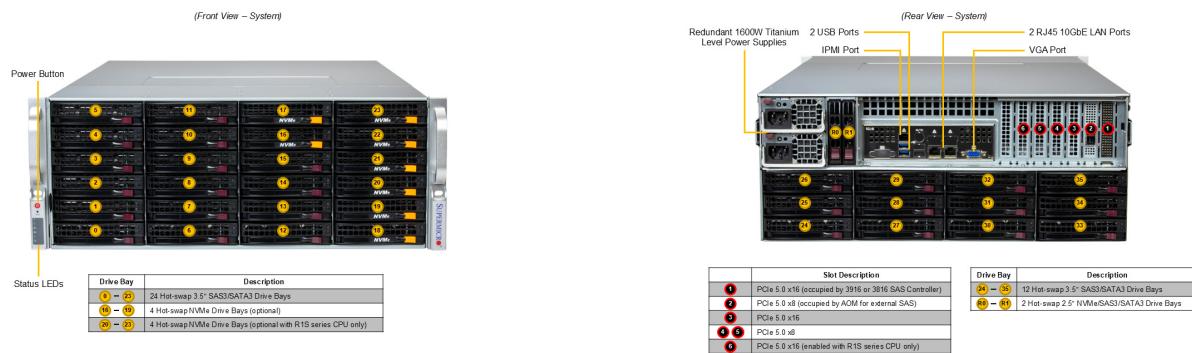

**System Cooling**  
Fans: 7 Heavy Duty PWM 80x80x38mm Fan(s)  
Air Shroud: 1 Air Shroud

**Power Supply**  
2x 1600W Redundant (1 + 1) Titanium Level (96%) power supplies

**System BIOS**  
BIOS Type: AMI 64MB UEFI  
BIOS Features: ACPI 6.5  
SMBIOS 3.7 or later  
UEFI 2.9

**Management**  
SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

**PC Health Monitoring**  
CPU: Monitors for CPU Cores, Chipset Voltages, Memory  
8 Phase-switching voltage regulator  
FAN: Fans with tachometer monitoring  
Status monitor for speed control  
Pulse Width Modulated (PWM) fan connectors  
Temperature: CPU thermal trip support, Monitoring for CPU and chassis environment, PECL

**Dimensions and Weight**  
Weight: Gross Weight: 102.5 lbs (46.4 kg)  
Net Weight: 65.5 lbs (29.7 kg)  
Available Color: Silver

**Operating Environment**  
RoHS Compliant  
Operating Temperature: 10°C to 35°C (50°F to 95°F)  
Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)  
Operating Relative Humidity: 8% to 90% (non-condensing)  
Non-operating Relative Humidity: 5% to 95% (non-condensing)

**Motherboard** [\*\*Super X14SBI-TF\*\*](#)

**Chassis** [\*\*CSE-847BTS-R1K68LPBP5\*\*](#)